

MORE HOENLE LED-UNITS

Water cooled type 

Air cooled type 



LED Spot W

The LED Spot W allows an extremely high UV intensity output – and requires only a very small amount of space.



jetCURE LED

Modularly controll- and changeable (grid 41 mm) as well as continuously adjustable. Available in two versions which differ in their cooling air duct.



LED Powerline Focus

Almost distance-indepen-
dent high intensity due to
focusing optics.




bluepoint LED eco

bluepoint LED eco has been
developed for all appli-
cations requiring a most
intensive punctiform
UV irradiation.



LED Spot 40 IC

The LED Spot 40 IC was
developed for all
applications requiring a
compact flood unit with high
intensities.

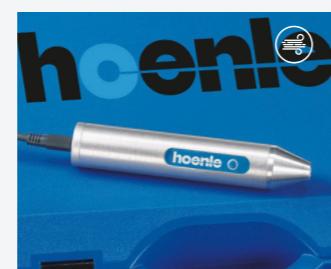


LED Power Pen 2.0

This handy LED point source
is available in the wavelengths
365 nm and 405 nm. Depend-
ing on the wavelength it is able
to generate UVA-intensities
of either 10.000 mW/cm² or
16.000 mW/cm².



LED Spot 100 IC / 100 HP IC & LED Spot 200 HP IC

The light-emitting aperture
has a size of about 100 x 100
or 200 x 50 mm.
For bigger irradiation fields,
several LED Spots can be
arranged modularly.

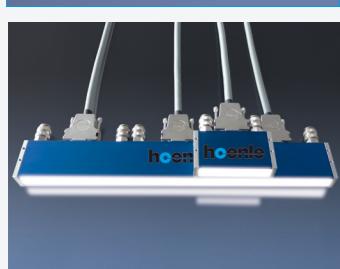

LED Powerline LC

Maximal length depends on
application (lengths variable
in 40 mm-steps).
The LED Powerline LC is
available in the wavelengths
365/385/395/405 nm.

LED POWERLINE AC/IC HP & LED POWERDRIVE IC



AIR COOLED

Max. irradiation intensity:
up to 16.000 mW/cm²
Wavelength:
365, 385, 395 und 405 nm

FEATURES

- LED Powerline AC/IC 410 up to 4.000 mW/cm²
- LED Powerline AC/IC 820 HP up to 16.000 mW/cm²
- Small dimensions
- Low weight
- Different wavelengths available

BENEFITS

- Low temperature load
- No heating phase
- Stackable without gap
- IC (Integrated Controller) or Plug & Play with LED powerdrive IC

hoenle AG
Nicolaus-Otto-Str. 2
82205 Gilching
Germany

Phone: +49 8105 2083-0
curing@hoenle.com
adhesivesystems@hoenle.com



Operating parameters depend on production characteristics and may differ
from the foregoing information. We reserve the right to modify technical data.
© Copyright Hoenle AG. Updated 09/25

www.hoenle.com

LED POWERLINE AC/IC

LED Powerline AC/IC is an air cooled high-performance UV LED array for intermediate curing (pinning), final curing for printing applications as well as curing of varnishes or UV-reactive adhesives and pottings.

LED Powerline AC/IC is available in wavelengths of 365/385/395/405 nm +/- 10 nm. This variety allows to adjust the wavelength perfectly to any application.

Integrated air-cooling guarantees a reliable continuous operation over the whole ambient temperature area, without depending on huge external heat exchangers.

For larger irradiation widths, LED Powerlines are stackable without gap to any lengths.

The power supply and control of the LED Powerline AC/IC can be done either by the optionally available LED power drive IC or by an external power supply and PLC signals.

SPECIAL FEATURES


- **Integrated Controller**
- Driving and monitoring of each LED segment
- Monitoring of LED segments regarding short-circuit, interruption and excess temperature
- Recording of the operating hours
- Analogue dimming of the segments via a 0-10 V-signal
- Digital PLC interface (LED enable, LED on, LED error)
- Bus control of all modules via RS485 or optional LED powerdrive IC

APPLICATIONS


The LED Powerline AC/IC is appropriate for various applications, such as

- Bonding, fixing or encapsulating of components in the electronic, optical or medical-technical sector
- Fluorescence stimulation for materials testing; also suitable for automatic image processing
- High-intensive UV irradiation in the chemical, biological and pharmaceutical sector

LED POWERLINE AC/IC 410

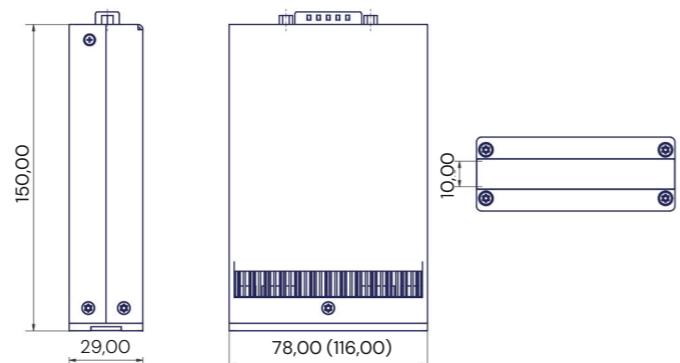

LED POWERLINE AC/IC 820 HP

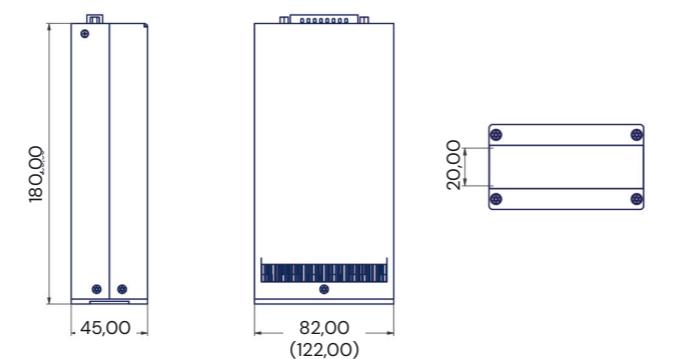

LED POWERDRIVE IC

LED powerdrive IC (Integrated Controller) allows the independent operation of up to 3 LED Powerline AC/IC. Two versions are available:

LED powerdrive IC 400 can drive one LED Powerline AC/IC 820 HP or alternatively up to three Powerlines AC/IC 410.

LED powerdrive IC 1200 can drive three LED Powerline AC/IC 820 HP or alternatively up to three Powerlines AC/IC 410.

The adjustment of the irradiation time is freely selectable in the ranges of 0.01 – 99.99 sec. or 0.1 – 999.9 sec or 1 – 9999 sec. Alternatively, continuous operation can be chosen.

The operating status and the temperature of the LED segments as well as the irradiation time can be seen on the display at a glance. **The electrical LED power can be adjusted between 10 % and 100 % in 1 %-steps.**

The device is recording the LED operating hours and the service menu gives comprehensive information about the current operation status.

In addition the LED powerdrive IC is characterized by the following features:

- Large and clear display with all relevant information
- Intelligent power control
- Temperature / error control of LED
- Shortest cycle time (0,01 s when set on display / 100 µs in case of external activation)

SPECIAL FEATURES

- Monitoring of LED segments regarding short-circuit, interruption and excess temperature
- auto recognition of connected LED Powerline AC/IC

INTERFACES

The LED powerdrive IC has the following interfaces:

- Analog preselected target value 0,2V – 10V =^ 2% – 100%
- PLC inputs: LED on, LED enable
- PLC outputs: LED is on, LED is off, LED error, LED warning
- Dry relais contact function (see PLC outputs)
- Foot switch
- LED enable signal
- Option: Fail-safe enable (Performance level d)

ADVANTAGES OF THE LED TECHNOLOGY


LEDs do not emit IR radiation. Even temperature-sensitive materials can be irradiated. The different spectra guarantee safe and fast curing. As LEDs do not require a warm-up phase, LED heads can be switched on and off without any problems: they are **ready for immediate operation**. The typical service life of a LED is longer than **20.000 hours****.

** typical lifetime under specified operating conditions


Name	LED Powerline AC/IC 410	LED Powerline AC/IC 820 HP
Irradiated area / output window in mm	78 x 10 or 116 x 10	82 x 20 or 122 x 20
Dimensions in mm	78 x 29 x 150 or 116 x 29 x 150	82 x 45 x 180 or 122 x 45 x 180
Wavelength in nm	365 385 395 405	365 385 395 405
Typ. intensity in mW/cm ² *	2.000 4.000 4.000 4.000	8.000 16.000 16.000 16.000
Cooling	Air cooled	
LED service life	> 20.000 hours**	

* measured with Hoenle LED sensors for UV meter

** typical lifetime under specified operating conditions

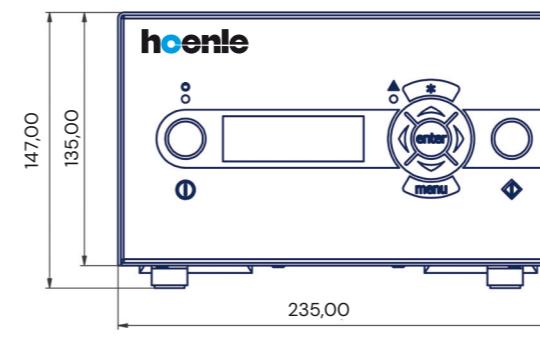

Front view

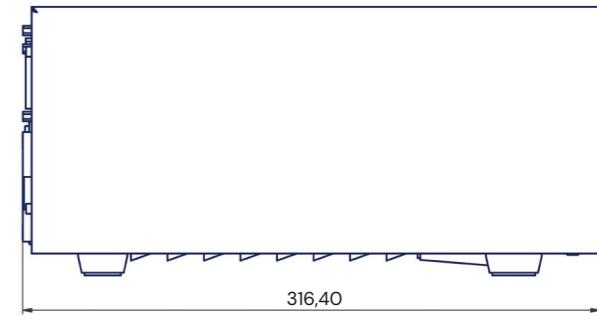

Side view